
		8	7	6	5			4
	NOT	ES						
F	1.	ASME Y14 ASME Y1.1	BLE STANDARDS AND SPECIF .5-1994, DIMENSIONING AND I , ABBREVIATIONS .36, SURFACE TEXTURE SYMB	D TOLERANCING				[
	,	ACCORDANC	CE WITH MIL-STD-130.	5 IN. [3mm] HIGH CHARACTE EV: 001	RS IN		1.000	
	3.	to prevent d	DAMAGE DURING	RT TO MAINTAIN CLEANLINES: PECIFIED ON THE PURCHASE (\oplus \oplus
E	I	FOLLOWING: FRIB PURC SHIPPING THE BUILDI (FRIB CON	ING NUMBER NTACT" AS SPECIFIED ON THE	THE PURCHASE ORDER, INCLU E PURCHASE ORDER	JDING			
		 SELLER'S N "TOP SIDE "FRAGILE, 	UP," IF REQUIRED " IF REQUIRED OPEN" LABEL. MINIMUM OF	GE(S) ONE LABEL PER SIDE PER SHIF	PPING			
D						[11.375	
С								
						.010 A	Ψ	
В					.010	// .010 A		

А

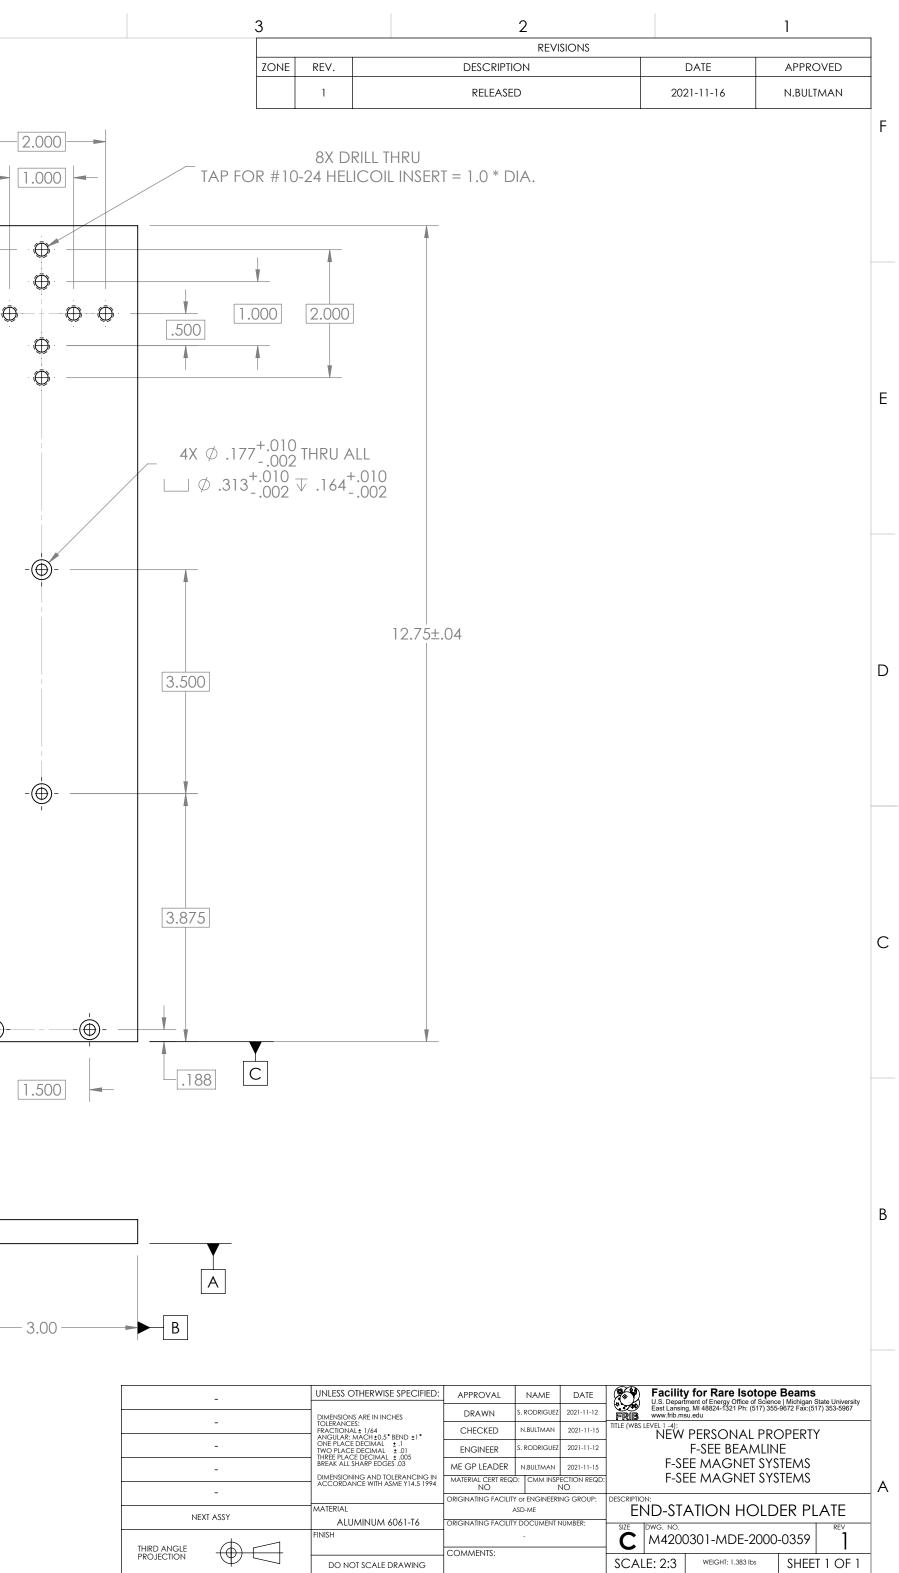

DRAWINGS WITHOUT DCC WATERMARK ARE FOR REFERENCE ONLY